

# B2 BLOS Demonstration

30 Days Post RFP Release

# Demo Set-up


- Scripted scenario will be generated and followed
- Same script for each system demonstrated

## **NOTE**

Once system is connected to Bird Dog it will be considered to be classified as

**Secret!**

# Test Setup

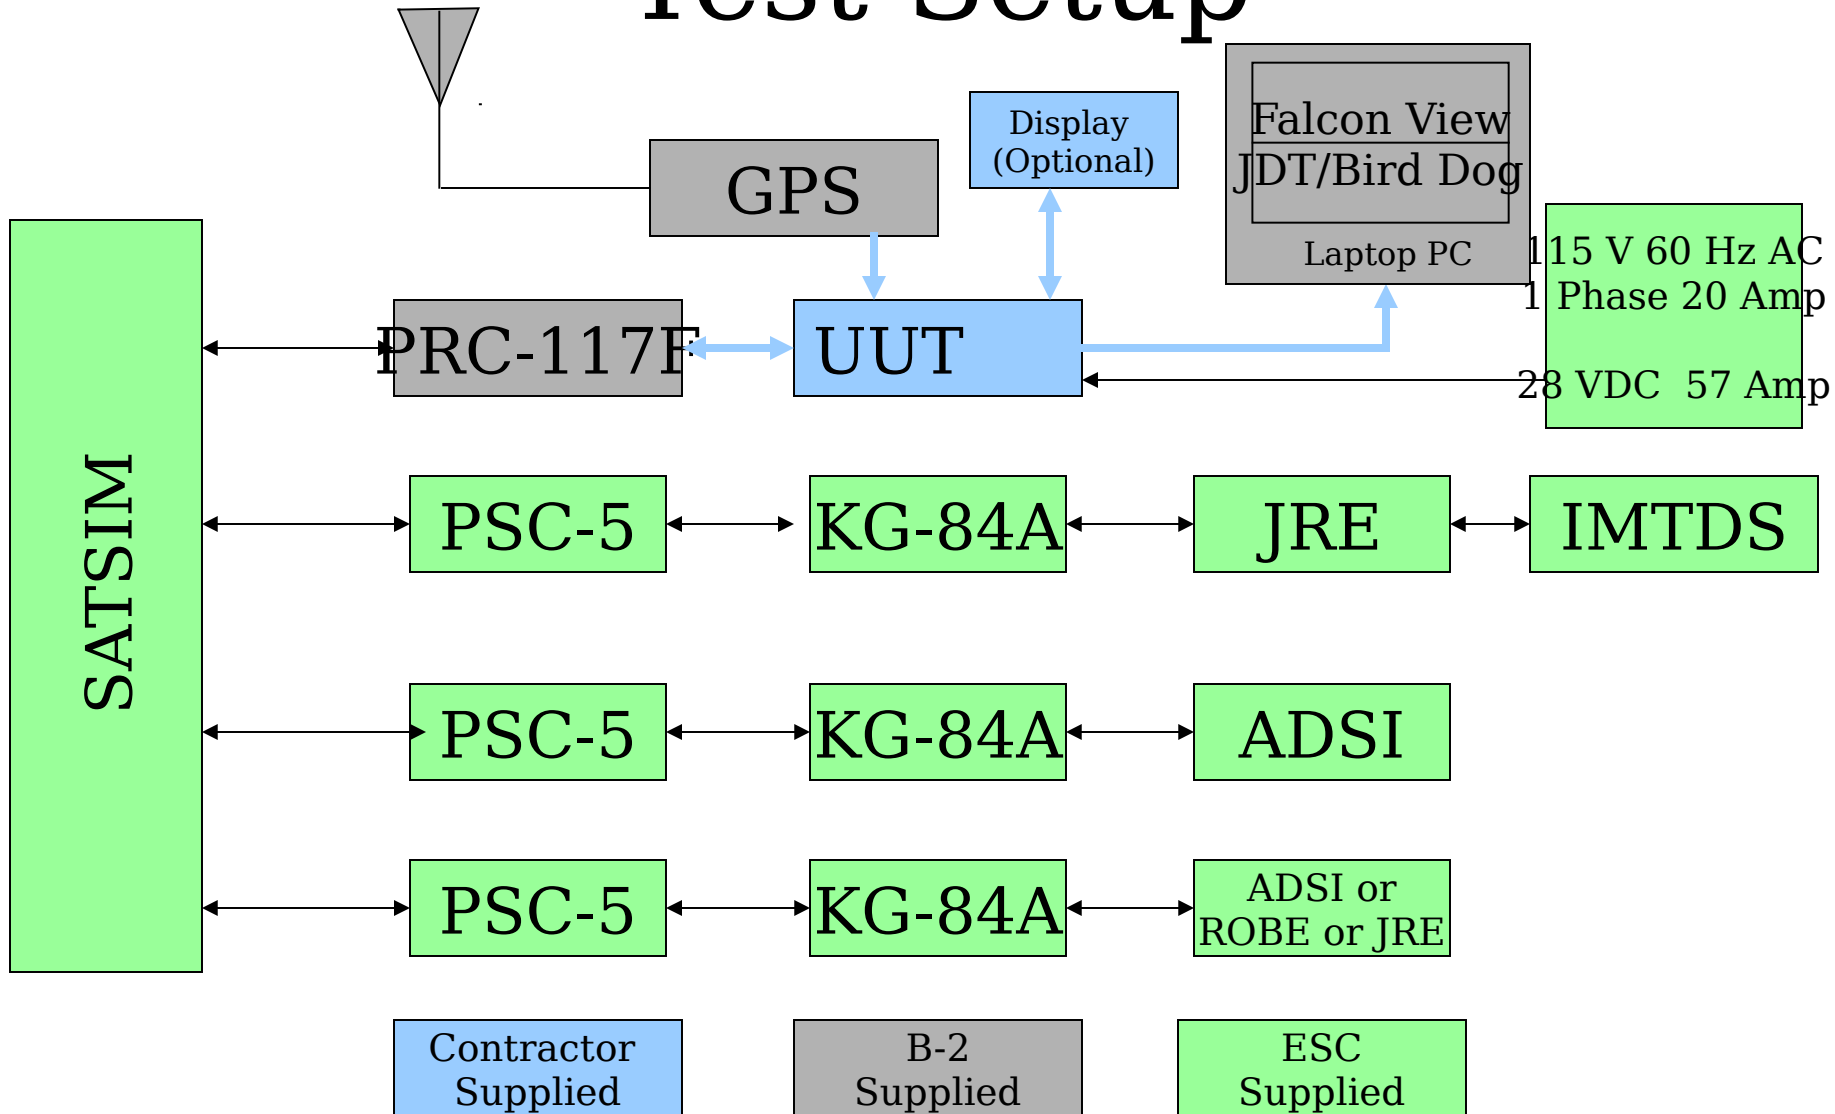

# ADSI

- Track Generation
  - J 3.0, 3.2, 3.3, 3.5
  - J 6.0
  - J 7.0, 7.4, 7.6, 7.7
  - J 10.2
  - J 15.0
  - J 28.2
- STGC or STGU

# JRE

- Data Forwarding for IMTDS
- STGC or STGU

# IMTDS

- Track Generation
  - J 2.0, 2.3, 2.5, 2.6, 2.2
  - J 28.2

# SATSIM

- DAMA Orderwire Channel Controller Trainer/Simulator (DOCCT/S)
- 25 KHz
- DAMA Orderwire
  - Selectable Encrypted/ Non-Encrypted
- 2 Channel, 4 port

# Additional Information

- Is UUT expected to run on 60 Hz
  - Lab can supply:
    - 115 VAC Single phase
      - Multiple 20 amp connections
    - 28 VDC 57 Amp
- Contractors must have Secret clearance to participate in the CEIF
- Send visit request to:

DAVID A. PACHECO, TSgt, USAF  
Personnel Security Specialist, ESC/CX0  
ESC/CX  
15 Eglin Street  
Building # 1607  
Hanscom AFB, MA 01731  
(781) 377-9485  
Fax # (781) 377-2200